CONCARDI VISION

	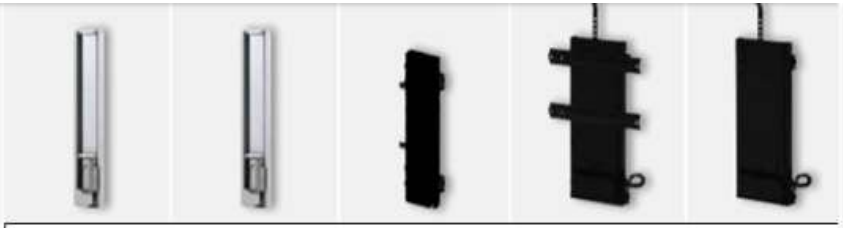									
Product	ETV 460A	ETV 460B	ETV 600A	ETV 700A	ETV 700B	ETV 750	ETV 1000A	ETV 1000B	SPTV 019	SPTV 0197SSB0
Min/Max. height (lid lifter excluded)	645/1105 mm	645/1105 mm	500/1100 mm	600/1300 mm	600/1300 mm	865/1465 mm	750/1750 mm	750/1750 mm	660/1180 mm	660/1180 mm
Max. stroke	460 mm	460 mm	600 mm	700 mm	700 mm	750 mm	1000 mm	1000 mm	520 mm	520 mm
Adjustable stroke	No	No	Yes	Yes	Yes	No	Yes	Yes	Optional R 121660 (for max height adjustment only)	No
Max load	5-50 kg 29 kg (mounted upside down)	0-50 kg 29 kg (mounted upside down)	12 kg (standard and mounted upside down installations) 15 kg peak load	65 kg (standard installation) 29 kg (mounted upside down) 100 kg peak load	45 kg (standard installatio 29 kg (mounted upside do 50 kg peak load	65 kg (standard installation) 29 kg (mounted upside down) 100 kg peak load	65 kg (standard installation) 29 kg (mounted upside down) 100 kg peak load	45 kg (standard installation) 29 kg (mounted upside down) 50 kg peak load	10-100 kg	10-100 kg
Colour	Silver	Silver	Black	Black	Black	Black	Black	Black	Silver and black	Silver and black
Reverse function	Yes	No	No	Yes	No	No	Yes	No	No	No
Input power	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz	110-240 VAC/ 50-60 Hz
AC plug	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS	EU/UK/US/NZ/AUS
Manual control switch	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes